

NXW 1007

Scotsman

Modular Ice Machine 480 kg

Item # :

Project :

Quantity :



FEATURES

- Dice, Half Dice or Large solid ice cubes
- Meets ENERGY STAR and LEED Eligibility Criteria
- SELF SANITATION System XSafe®
- Natural refrigerant R290 with GWP 3 and ODP 0
- Very large air vents, keeping high yield in hot environment
- Hinged front panel
- Tools free removal of internal parts (water sump, distribution tube, pump, etc)
- Super easy internal cleaning
- Remote service support capability with XWave free App.
- Delayed automatic start
- Automatic Cleaning cycle



NXW 1007
Dice-10g
W22 xD22xH22 mm



NXW H 1007
Half Dice-6g
W10 xD22xH28 mm



NXW L 1007
Large Dice-15g
W28 xD22xH28 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE
V Hz /ph
230/50/1

RECOMMENDED BINS

Head	Bins		kg
NXW 1007	✓	NB 393	178
	✓	NB 530	243
	CBT 48 FM CD	NB 948	406



LEGEND:

- ✓ Perfect combination between ice maker and bin
- Ice chute cut-out performed upon installation

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10 °C	40 °C
Water temperature	5 °C	35 °C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple Storep
Google play
Windows Store



www.scotsman-ice.it
www.scotsman-ice.com

NXW 1007




Scotsman

Modular Ice Machine **400 kg**


Item # :

Project :

Quantity :

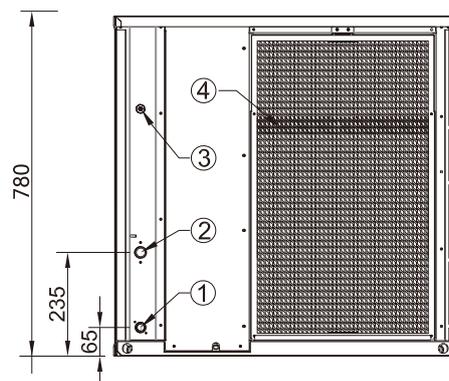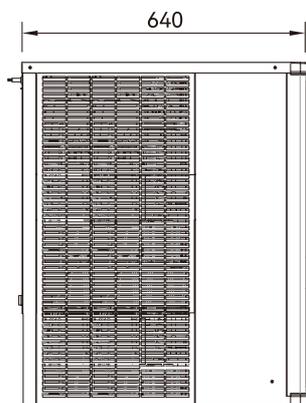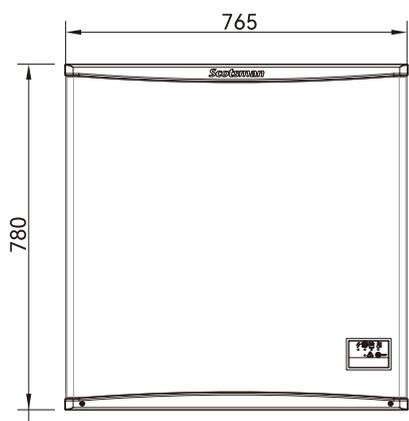

1. 3/4" GAS-WATER OUTLET
2. 3/4" GAS-WATER INLET
3. CORD SET
4. AIR INLET / AIR FILTER

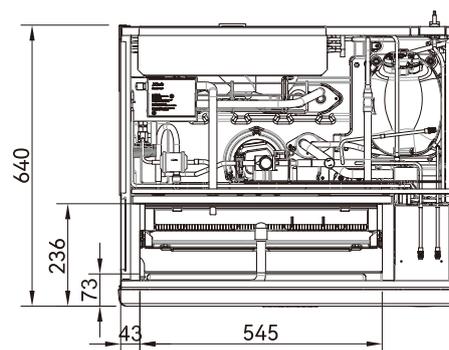

UNIT DATA

Size WxDxH 767 x 636 x 780 mm
Net weight 97 kg

SHIPPING DATA

Carton WxDxH 700 x 820 x 920 mm
Weight 113 kg

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kwh/ 100 kg	kwh/ 24h	l/h	W	W	No. x Ømm ²	A
NXW 100 7AS	230/50/1	460	437	380	9.9	37.7	19.2	1620	4743	3 x 2.5	30
NXW H 1007 AS	230/50/1	480	470	390	9.9	38.7	19.3	1620	4743	3 x 2.5	30
NXW L 1007 AS	230/50/1	450	430	360	10.6	38.1	18.2	1620	4743	3 x 2.5	30

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg