

# NXW 707

# Scotsman

## Modular Ice Machine 320 kg

Item # :

Project :

Quantity :



### FEATURES

- Dice, Half Dice or Large solid ice cubes
- Meets ENERGY STAR and LEED Eligibility Criteria
- SELF SANITATION System XSafe®
- Natural refrigerant R290 with GWP 3 and ODP 0
- 22" (56 cm) SLIM width with no need of side clearance (top exhausts)
- Hinged front panel
- Tools free removal of internal parts (water sump, distribution tube, pump, etc)
- Super easy internal cleaning
- Remote service support capability with XWave free App.
- Delayed automatic start
- Automatic Cleaning cycle



NXW 707  
Dice-10g  
W22 xD22xH22 mm



NXW H 707  
Half Dice-6g  
W10 xD22xH28 mm



NXW L 707  
Large Dice-15g  
W28 xD22xH28 mm

**CONDENSING SYSTEM**  
Air cooled

**REFRIGERANT GAS**  
R290

**VOLTAGE V/ Hz /ph**  
230/50/1

### RECOMMENDED BINS

Head	Bins		kg
	✓	<b>NB 193</b>	129
<b>NXW 707</b>	CBT 30 EM CD	<b>NB 393</b>	178
	CBT 30 EM CD	<b>NB 530</b>	243



### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10 °C	40 °C
Water temperature	5 °C	35 °C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	- 10%	+10%

IMPORTANT NOTICE:  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

Down load our free **App Scotsman Ice**  
Apple Storep  
Google play  
Windows Store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

# NXW 707


# Scotsman

## Modular Ice Machine 320 kg

Item # :

Project :

Quantity :

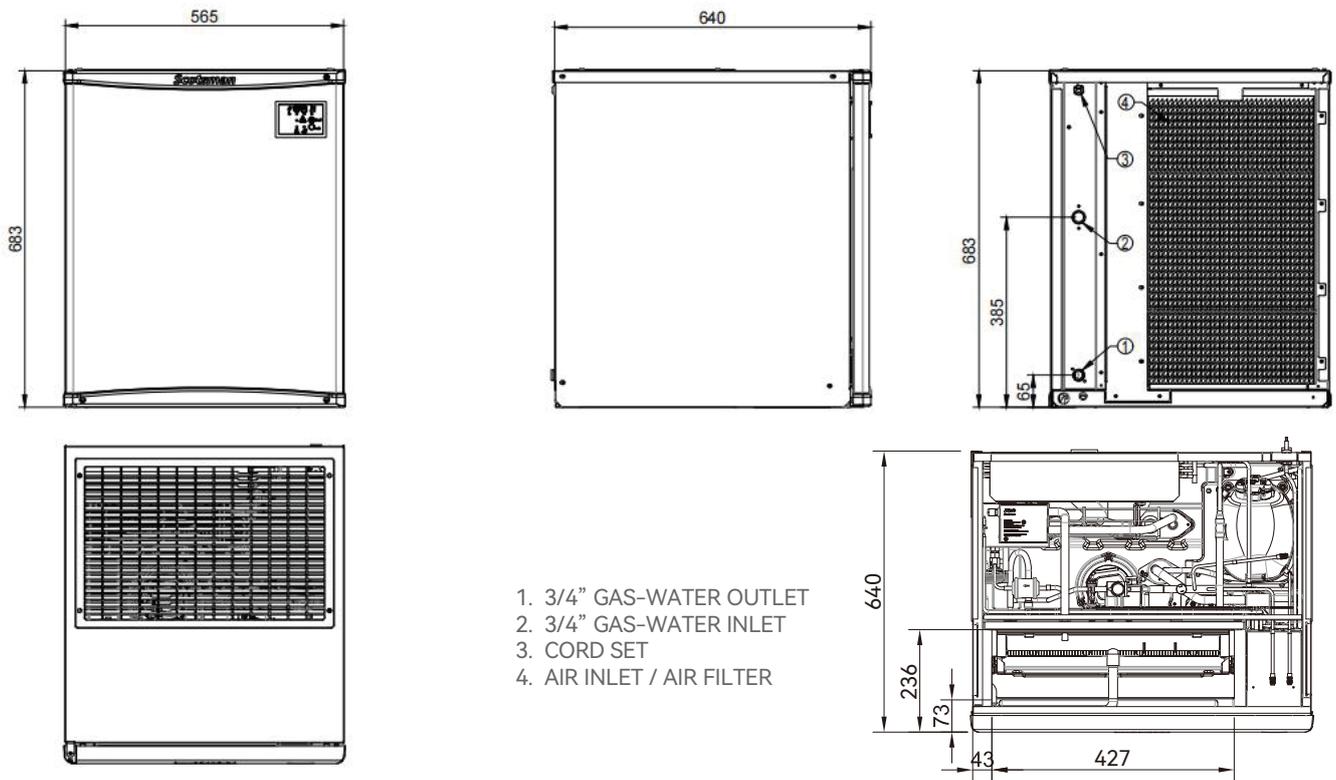

1. 3/4" GAS-WATER OUTLET
2. 3/4" GAS-WATER INLET
3. CORD SET
4. AIR INLET / AIR FILTER

### UNIT DATA

Size WxDxH 565 x 640 x 683 mm  
Net weight 74 kg

### SHIPPING DATA

Carton WxDxH 700 x 620 x 850mm  
Weight 86 kg

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*) l/h	Instant power W	Compressor W	Circuit wires No. x Ømm²	Max. fuse size A
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kwh/ 100 kg	kwh/ 24h					
NXW 707 AS	230/50/1	320	296	240	11.3	27.0	13.7	1165	3398	3 x 2.5	30
NXW H 707 AS	230/50/1	320	310	250	11.2	28.1	14.9	1165	3398	3 x 2.5	30
NXW L 707 AS	230/50/1	270	280	230	11.8	27.2	13.3	1165	3398	3 x 2.5	30

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg